

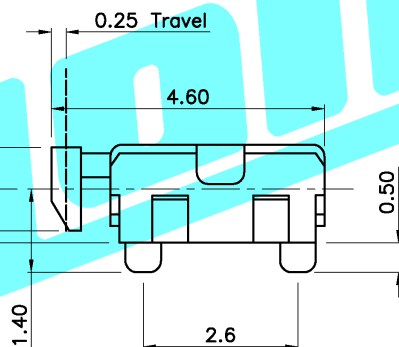


PCB Layout recommended

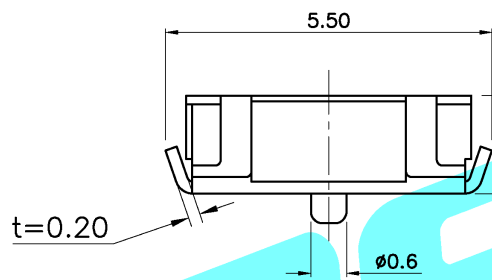

Circuit diagram

PART NO.	
TD-1222UA	
TD-1222UN	

NO.1	
PART NO	vigor
1	70±30
2	100±50
3	160±50
4	260±50
5	320±80
6	350±80
7	520±130

NO.2	
PART NO	MATERIAL/QTY
S	SUS/1PC
D	SUS/2PCS

NO.3	
PART NO	NOTE
1~9	SERIAL NUMBER

NO.4	
PART NO	NOTE
B	Bulk
R	Tape&Reel

⑥	Cover B	2	Pi Polimides	Yellow
⑤	Terminal	4	Phosphor Bronze	Ag-PLATED
④	Shell	1	SUS	Natural
③	Contact	1	SUS	Ag-PLATED
②	Base	1	Nylon	Black
①	Keystoke	1	Nylon	Black
ITEM	PART NAME	QTY.	MATERIAL	FINISHING

APPROVALS		DATE
DRAWN	G.M.Chen	2015/5/19
CHECKED		
APPROVALS		

**DERION 德艺隆**  
ELECTRONICS CO.,LTD

TITILE:	TACT SWITCHES								
PART NO.	TD-1222UA-AXN-XXX								
UNIT: mm	SCALE: 1:1								
DRAWING NO.	PROJ:								
TOLERANCES ARE	<table border="1"> <tr> <td>30~以上</td> <td>±0.30</td> </tr> <tr> <td>10~30</td> <td>±0.20</td> </tr> <tr> <td>5~10</td> <td>±0.15</td> </tr> <tr> <td>~ 5</td> <td>±0.10</td> </tr> </table>	30~以上	±0.30	10~30	±0.20	5~10	±0.15	~ 5	±0.10
30~以上	±0.30								
10~30	±0.20								
5~10	±0.15								
~ 5	±0.10								
ANGLE	±2°								
SHEET	1 OF 1								

ECN NO.	REV.	DATE.	NEW	CHANGE.	CHECK.	APPRO.
			DESCRIPTION.			